

High-Class, Multi-Frequency GNSS Antenna



For Multi-Sensor RTK Modules and
RTCM Reference Station

Miniaturized and light-weight, multi-frequency GNSS antenna


High gain, wide beam width, and top performance even at low elevation angles.

Multipath suppression technique improves performance in challenging environments.

Frequencies:
GPS L1/L2,
Galileo E1, E5,
GLONASS L1/L2,
Beidou B1/B2/B3



**Stable Carrier
Phase Center**



**Accurate Attitude
and Position**



**Compact
Design**



Breakthrough
price



Easy Integration
and Mounting

PERFORMANCE:

Frequencies:


GPS L1/L2, Galileo E1/E5, GLONASS L1/L2,
Beidou B1/B2/B3

Peak Gain:	4 dBi
Polarization:	RHCP
Axial Ratio:	< 3dB
Azimuth Coverage:	360°
Impedance:	50 Ohm
Output VSWR:	< 2.0
Phase Center Offset:	20.24 mm
Phase Center Accuracy:	+/- 3 mm

LNA:

LNA Gain:	36 +/- 2dB
Noise Figure:	< 2.0dB
Output VSWR:	< 2.0
Operation Voltage:	3.3-12 V DC
Operation Current:	< 45 mA
Group Delay:	< 5 ns

Structure Overview:

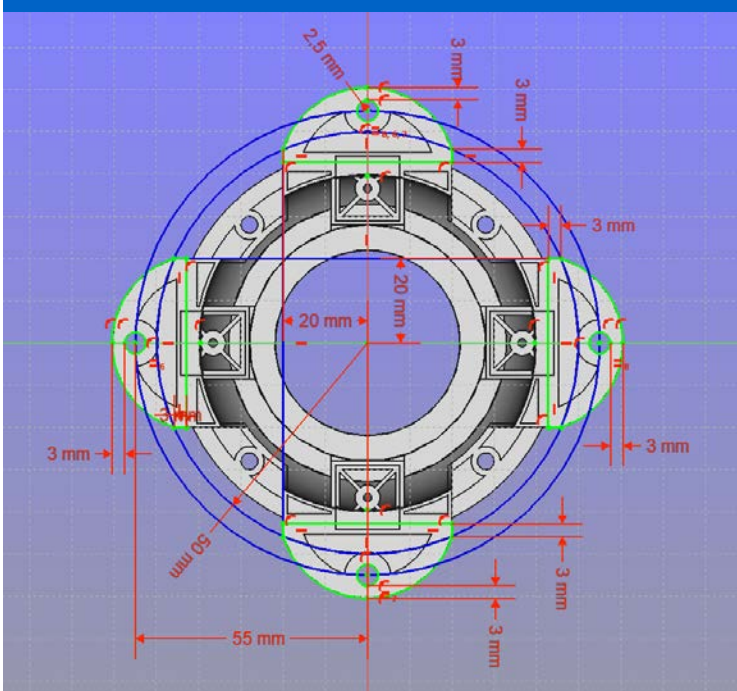

Mechanical:

Dimension:	Width: 121 mm Height: 45 mm
Connector:	SMA Female
Weight:	157 g

Environmental:

Operating Temp:	-40° to +80°C
Storage Temp:	-55° to +85°C
Humidity:	95% not condensing
Dust- & Waterproof:	IP67



ANAVS GmbH

Gotthardstraße 40, 80686 Munich

Phone: +49 (0) 89 89056721

Fax: +49 (0) 89 89056720

Email: info@anavs.de

Web: <http://www.anavs.de>